



Secure your sites with cloud-managed intrusion detection and 24/7 professional monitoring

Overview

Built on Verkada's cloud-based Command platform, Alarms provides organizations with tools to detect and respond to threats across their physical spaces.

Verkada Alarms leverages data captured across Verkada devices including cameras, doors, environmental sensors, and intrusion sensors to identify important events and provide visibility as incidents unfold.

Included with Alarms is 24/7 professional monitoring with optional video verification and emergency dispatch capabilities. While your site is armed, trained operators at UL-Listed central stations are standing by to assess and help respond to incidents. Organizations have the ability to provide operators with controlled access to event-based video feeds to reduce false alarms and provide essential context during emergencies.


Alarms can be managed from anywhere with Verkada's Command platform and Verkada Alarms mobile app. Additionally, organizations can deploy Verkada's Alarm Console for onsite arming/disarming with an integrated camera and talk-down functionality.

Key Features

- Intrusion detection that utilizes Verkada cameras, doors and sensors.
- Support for wired and wireless sensors as well as backup cellular connectivity.
- Built-in 24/7 professional monitoring provided by trained operators.
- Alarm Console with keypad, integrated camera, and talk-down.
- Cloud-managed with easy configuration of alarm triggers and responses.
- 10-year warranty on all hardware.



Verkada's Cloud-Managed Alarms Platform

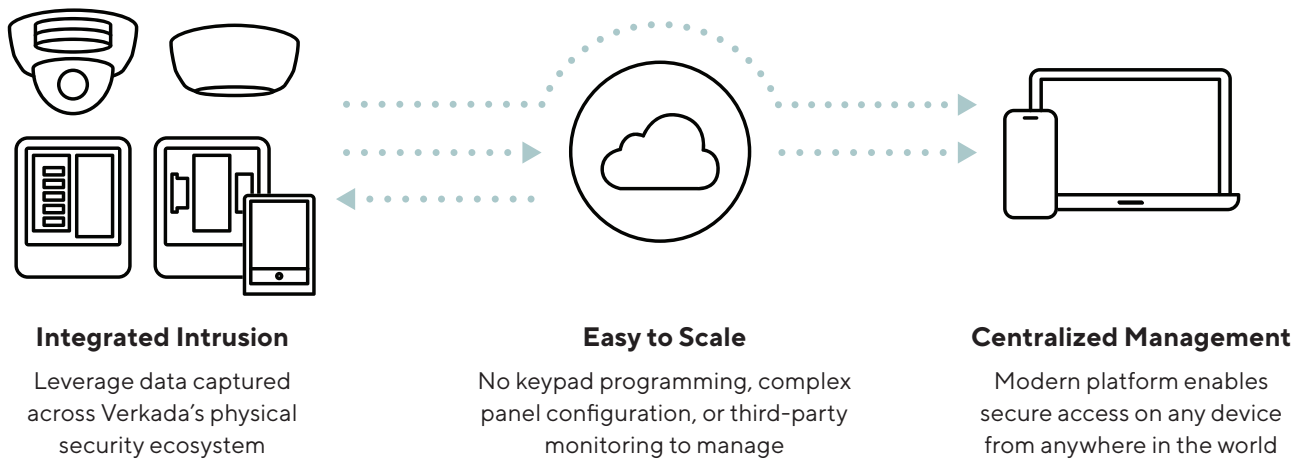

Benefits

Simple Setup

- Enable Alarms using any Verkada device as an alarm trigger.
- Devices come online and configure in minutes.
- No additional software or complicated setup.

Seamlessly Integrated

- Instantly connect Verkada cameras, doors, environmental sensors, and wired / wireless intrusion sensors.
- Complete security ecosystem managed under a single dashboard.
- Shared user administration across alarms and other Verkada products.

Advantages of Cloud-Managed Solution

- Secure remote access from any device anywhere.
- SAML-based integration with single-sign on (SSO) solutions.
- Continuous updates with new features.

Easy to Use

- Customizable alarm triggers and responses with intuitive interface.
- Arm/disarm sites from anywhere via Command or Alarms App.
- One-click setup of 24/7 professional monitoring.

Professional Monitoring

- Reduced false alarms with unlimited video verification.
- Customizable rules for escalation of alarm response, with optional dispatch of emergency first responders.
- 3 fully redundant, UL-listed, TMA 5 Diamond-rated central monitoring stations in the U.S. and Canada with team of trained security professionals.

No Hidden Costs

- Hardware includes an industry-leading 10-year warranty.
- Automatic firmware updates keep systems secure and up-to-date.
- New features and enhancements are added at no additional cost.


Compliance & Availability

Verkada is committed to ensuring its services and systems comply with applicable regulations. The Verkada Alarms products and services are restricted to certain regions. Please see our compliance webpage for more information: <https://verkada.com/alarms-availability>. Please note there may be local or state requirements surrounding sales and installation; consult with your local Verkada reseller for additional information.



Alarms Platform Overview

Seamlessly manage sites, configure alarm triggers, and customize alarm responses.

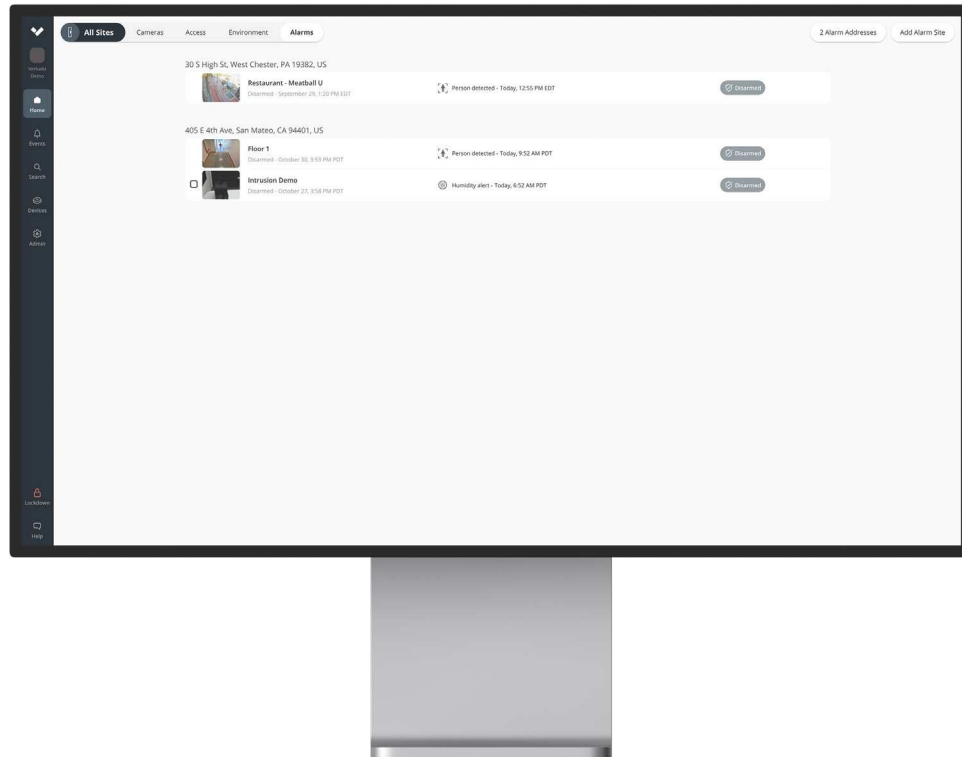

Alarms is powered by Verkada's Command Platform. This cloud-based management solution delivers secure remote access with an intuitive interface for ease of use.

Site Management

- See overview of current status and recent events from all sites.
- Schedule arming/disarming and configure keycodes for on site management.
- Instantly view incidents and play back event footage with integrated Verkada video surveillance.
- Control access to your Alarm sites with role-based permissions.

Device Management

- Configure wired and wireless sensors from Command with just a few clicks.
- Create alarm triggers based on events from any Verkada device.
- Manage fleet of devices from single dashboard.

Professional Monitoring Configuration

- Enable video verification of alarms by trained security professionals.
- Enable dispatch of emergency services.
- Configure an ordered list of contacts for monitoring agents to call and text when an alarm is raised.

Alarm Console Talk-Down

- From Command, initiate two-way video calls down to Alarm Consoles at any of your sites, from anywhere in the world.
- Make calls to Alarm Console to address staff, guests, or potential intruders.
- Configure custom messages to announce in the event of an alarm.



Professional Monitoring Overview ¹

Meet your virtual guard

Incidents are unpredictable. Ensure your sites are protected 24/7 with our professional monitoring service. Monitoring is provided by three fully redundant, U.S.-based, UL listed central stations with Five Diamond Certification from The Monitoring Association.

Assess the Situation


- Acting as virtual guards, agents will review video of potential alarm events in real time to escalate emergencies and screen out false alarms.
- Users will not be contacted unless incidents are confirmed as real alarms by an agent.

Make Contact

- When an alarm is raised, agents call and send SMS messages to your preconfigured list of contacts.
- If there's a visible emergency in progress, agents will dispatch local first responders immediately.

Take Action

- If a threat is confirmed, or if no one from your list can be reached, agents will dispatch local first responders to the site address.
- All events can be reviewed, archived and accessed from Command for incident investigation.

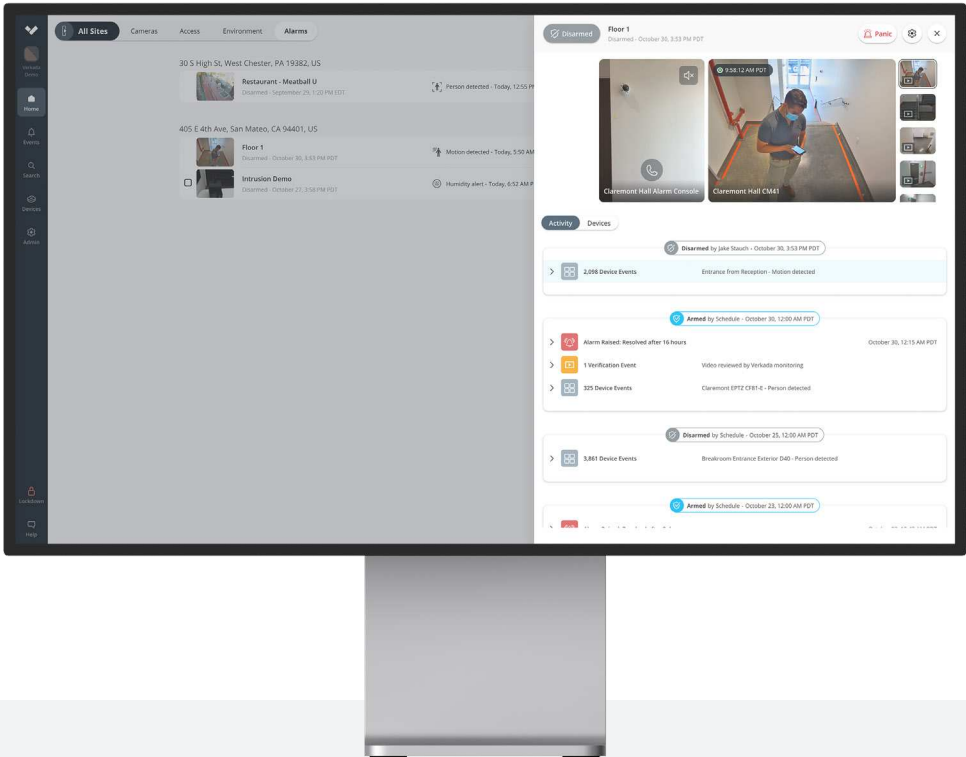

Alarm License Pricing

Product Name	Description	Cost (MSRP) USD
LIC-BA-1Y	1-Year Alarm License	\$1,499
LIC-BA-3Y	3-Year Alarm License	\$3,999
LIC-BA-5Y	5-Year Alarm License	\$5,999
LIC-BA-10Y	10-Year Alarm License	\$11,999

LIC-BA Alarm License

The Alarm License includes access to the cloud-managed Verkada Alarms platform and integrated professional monitoring. One Alarm License is required for each unique site address.


An Alarm License is required for the BP41 Alarm Panel, BH61 Wireless Alarm Hub, and BC51 Alarm Console.

¹ Monitoring is provided by Verkada’s independent monitoring center partners.



Verkada Alarms App

Arm / disarm sites and raise panic alarms from your mobile device with the Verkada Alarms app.

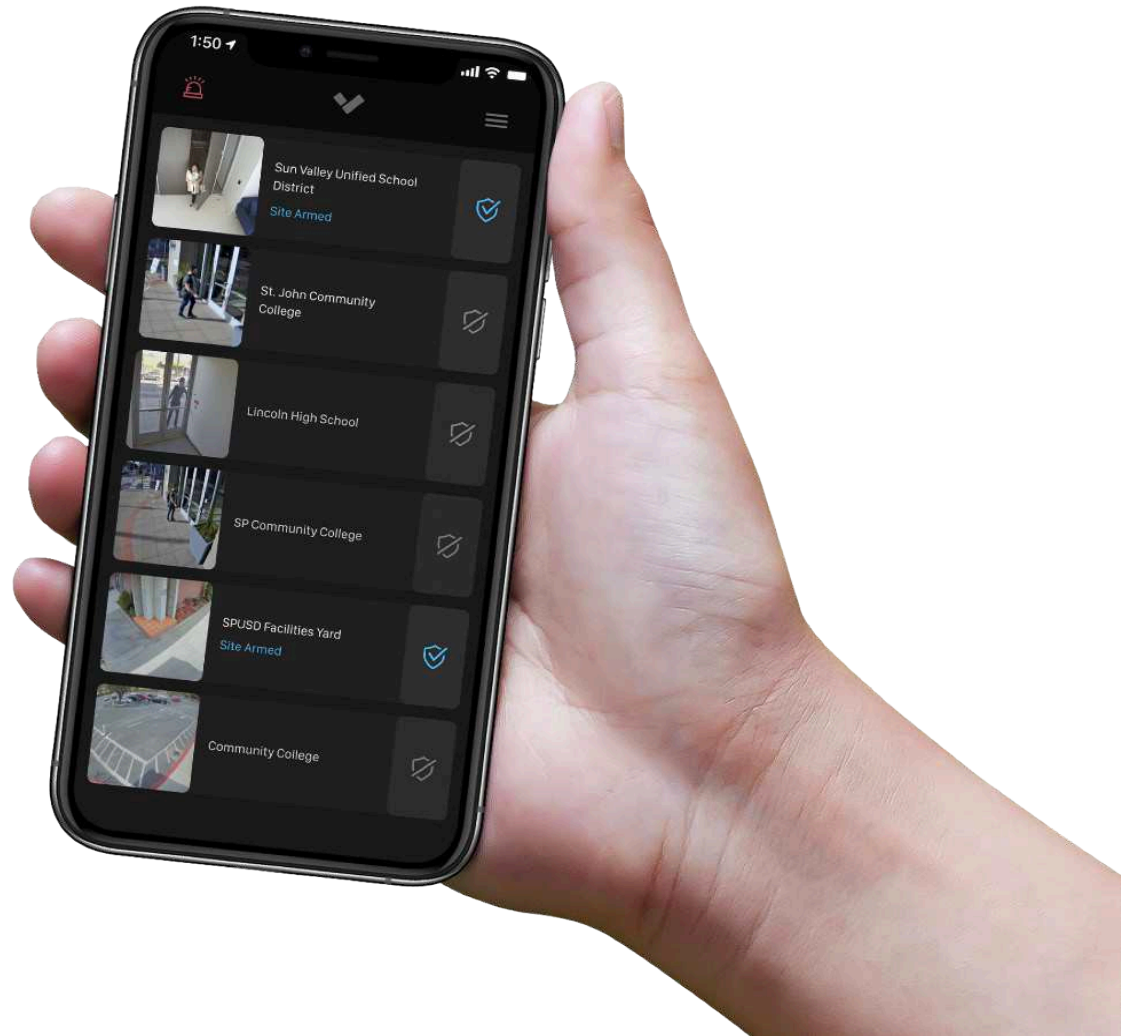


The Verkada Alarms app makes it easy to arm and disarm sites and raise panic alarms in the event of an emergency. Administrators grant users access to the app through Command and can restrict which sites can be managed by which users.

The Verkada Alarms app is available on iOS and Android.



Wireless Intrusion Detection

Wireless sensor network optimized for security, range, and battery life.

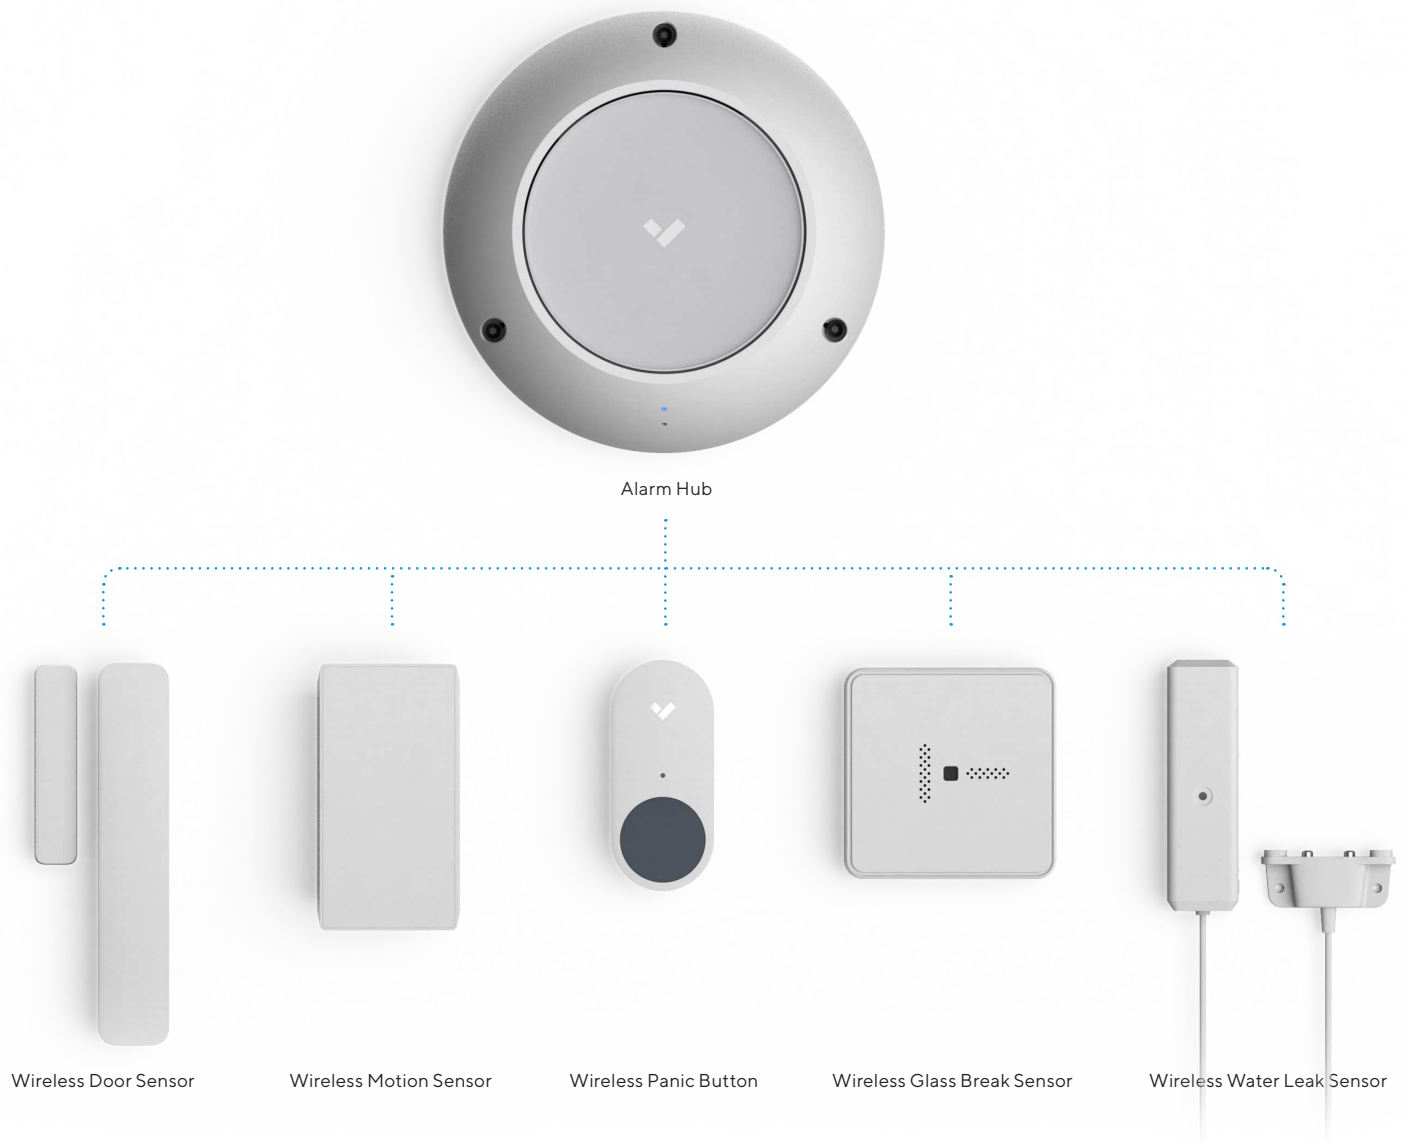

Key Features

- Cloud-based software for easy management and monitoring.
- Line-of-sight range of up to 1,000 ft.
- Battery life of up to 10 years for door sensor, 2-5 years for other sensors (typical use).
- Secure signaling with end-to-end encryption (AES-128) and Direct Sequence Spread Spectrum technology.
- Instant integration with Verkada Video Security and 24/7 professional monitoring.
- Full suite of devices including wireless door, motion, panic button, glass break, and water leak sensors.
- PoE-powered Wireless Hub for easy wireless deployments in any environment.



BH61 Wireless Alarm Hub

PoE-powered hub enables two-way communication with wireless sensors.

Overview

Complete Coverage

- Support for up to 60 wireless sensors at a range of up to 1,000 ft.
- Wall or ceiling mounted.

Easy Management

- Cloud-managed from Command for easy device configuration and monitoring.
- Automatic firmware updates for the latest features and security enhancements.

Stays Connected

- Built-in backup battery to keep system online for up to 12 hours in the event of a power loss.
- Compatible with the ACC-CEL-LTE accessory for plug-and-play backup cellular connectivity.

10-Year Warranty

- Verkada’s Wireless Alarm Hub and sensors are covered by our 10 year warranty.



Wireless Alarm Hub Pricing

Product Name	Description	Cost(MSRP) USD
BH61-HW	Wireless Alarm Hub	\$999
LIC-BH-1Y	1-Year Hub	\$249
LIC-BH-3Y	3-Year Hub	\$599
LIC-BH-5Y	5-Year Hub	\$999
LIC-BH-10Y	10-Year Hub	\$1,999



Wireless Alarm Hub

Tech Specs


Power Consumption	14W
Dimensions	Height: 155 mm / 6.1 in Width: 155 mm / 6.1 in Depth: 67 mm / 2.6 in
Wireless Communication	Proprietary 915 MHz (US, Canada) / 868 MHz (UK, Europe)
Backup Battery (Internal)	7.3V/2850mAh; 12 hours of backup with typical use
Weight	.87 kg / 1.91 lbs
Operating Temperature	0°C – 45°C (32°F– 113°F), 0-90% humidity
Compliance	Please see https://www.verkada.com/alarms-availability/
Connectivity	10/100Mbps RJ-45 cable connector for Network/PoE connection USB 2.0 for ACC-CEL-LTE Cellular Backup Module (not included)
Included Accessories	QSG, 3x Machine screws, 3x Wing Nuts, 3x Washers, 4x Wall Screws, 4x Wall Anchors, Torx Wrench
Mounting Options	Dry wall anchors (M8) and screws (M5)



Wireless Sensors

A full suite of wireless devices that integrate with the BH61 Wireless Hub to detect alarm events – includes door, motion, panic button, glass break, and water leak sensors.


- Secured by end-to-end encryption (AES-128) and Direct Sequence Spread Spectrum technology.
- Line-of-sight range of up to 1,000 ft.
- Automatically pair with the BH61 Wireless Alarm Hub.
- Integrate with Verkada Video Security for instant visibility into alarm events.
- All wireless sensors are covered by our 10-year warranty.
- Up to 10 years of battery life for door sensors, 2-5 years for other sensors.

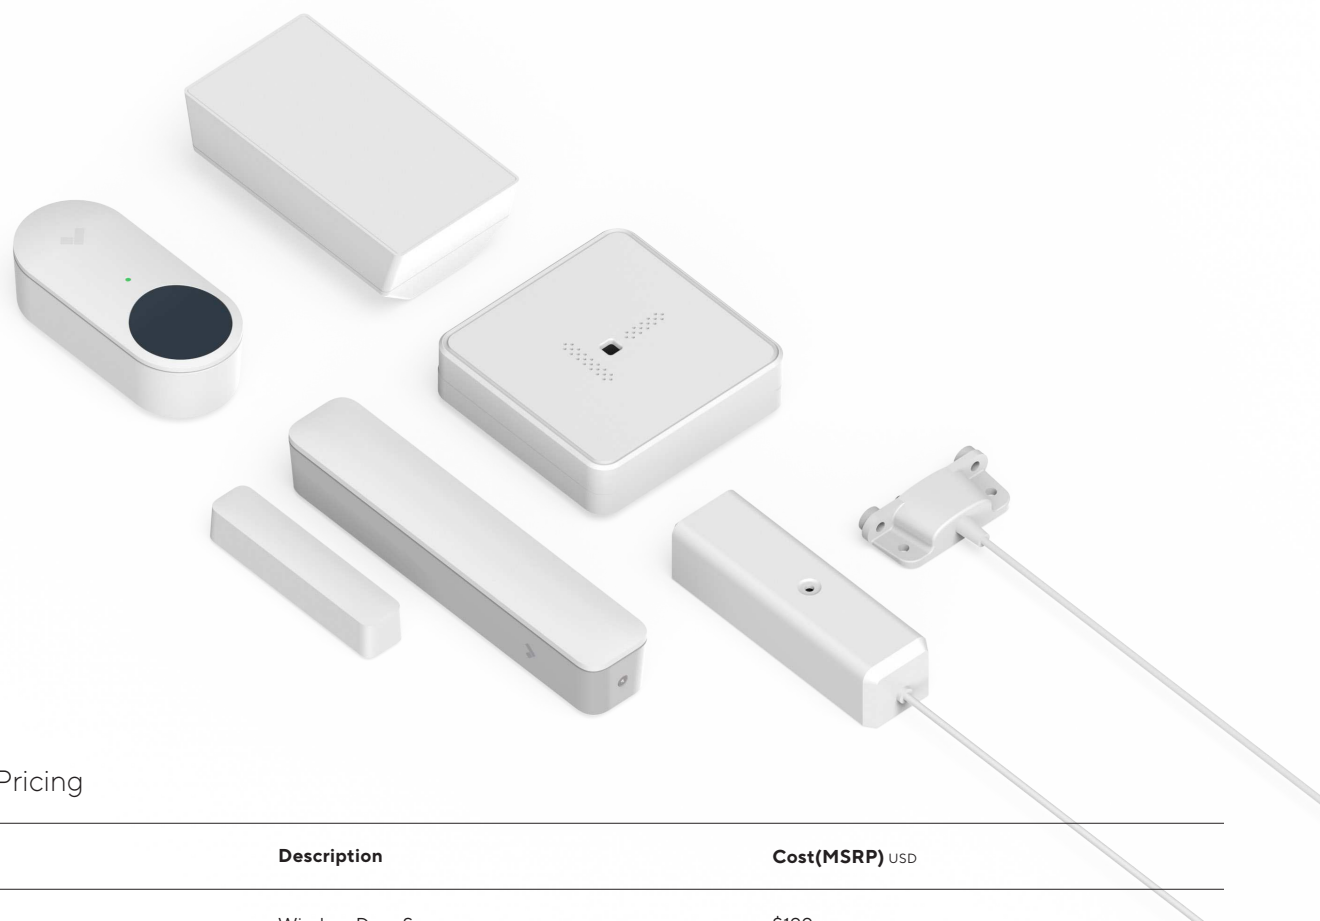

Wireless Sensor Pricing

Product Name	Description	Cost(MSRP) USD
BR31-HW	Wireless Door Sensor	\$199
BR32-HW	Wireless Motion Sensor	\$199
BR33-HW	Wireless Panic Button	\$199
BR34-HW	Wireless Glass Break Sensor	\$199
BR35-HW	Wireless Water Sensor	\$199

For all wireless sensors, the typical line-of-sight wireless communication range without obstructions is 1,000 feet from the sensor to the Wireless Hub. The range is around 200 feet in typical office environments. At least one Wireless Hub will be required for each building floor. Your experience may vary based on site conditions, wall thickness/material, wireless interference, and other variables. We recommend doing a site survey to determine optimal placement of Wireless Hub(s).

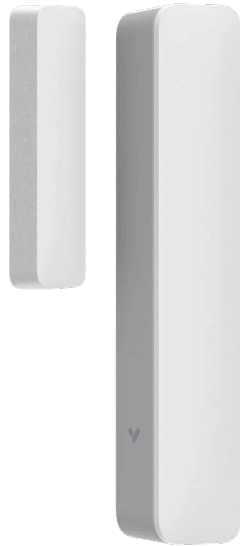


BR31 Wireless Door Sensor

Tech Specs

Power Supply	2 x CR123A Lithium Batteries	
Dimensions	Sensor Height: 139.7 mm / 5.50 in Width: 27 mm / 1.06 in Depth: 25.4 mm / 1.00 in	Magnet Height: 70 mm / 2.75 in Width: 16 mm / .63 in Depth: 17 mm / .67 in
Battery Life	Up to 10 years	
Wireless Range	1,000 ft (line-of-sight)	
Door Gap Width	Adjustable up to 5 cm / 2 in	
Wireless Communication	Proprietary 915 MHz (US, Canada) / 868 MHz (UK, Europe)	
Weight	Sensor 85 g / 3 oz	Magnet 25 g / 0.88 oz
Operating Temperature	0°C - 45°C (32°F - 113°F), 0-90% humidity	
LED Indicator	Test mode and low battery	
Compliance	Please see https://www.verkada.com/alarms-availability/	
Included Accessories	QSG, 4x Wood Screws, 4x Sheet metal screws, 1x T10 Torx L Key, VHB Adhesive Mount	
Mounting Options	Wood and Metal screws; VHB Adhesive Mount	

For availability, please see <https://www.verkada.com/alarms-availability/>

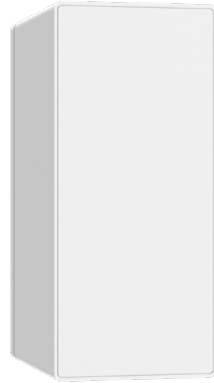

BR32 Wireless Motion Sensor

Tech Specs

Power Supply	2 x CR123A Lithium Batteries
Dimensions	Height: 94 mm / 3.7 in Width: 51 mm / 2 in Depth: 34 mm / 1.33 in
Battery Life	Up to 5 years
Wireless Range	1,000 ft (line-of-sight); 200 ft (typical environment)
Detection Range	Max 32 feet / 10 meters
Field of View	90° Horizontal
Sensor Type	Passive Infrared (PIR)
Wireless Communication	Proprietary 915 MHz (US, Canada) / 868 MHz (UK, Europe)
Weight	93 g / 3.28 oz
Operating Temperature	0°C - 45°C (32°F - 113°F); 0-90% humidity
LED Indicator	Test mode and low battery
Compliance	Please see https://www.verkada.com/alarms-availability/
Included Accessories	QSG, Wall Screws, Wall Anchors
Mounting Options	Corner or wall mount; Dry wall anchors and screws

For availability, please see <https://www.verkada.com/alarms-availability/>



BR33 Wireless Panic Button

Tech Specs

Power Supply	1x CR123A Lithium Battery
Dimensions	Height: 81 mm / 3.2 in Width: 36 mm / 1.42 in Depth: 24 mm / .94 in
Battery Life	Up to 5 years
Wireless Range	1,000 ft (line-of-sight); 200 ft (typical environment)
Wireless Communication	Proprietary 915 MHz (US, Canada) / 868 MHz (UK, Europe)
Weight	49 g / 1.73 oz
Operating Temperature	0°C – 45°C (32°F – 113°F); 0–90% humidity
LED Indicator	Successful transmission, unsuccessful transmission, low battery
Compliance	Please see https://www.verkada.com/alarms-availability/
Included Accessories	QSG, Wall Screws, Wall Anchors, Torx Wrench, VHB Adhesive Mount
Mounting Options	Wall or surface mount; Loop for lanyard attachment

For availability, please see <https://www.verkada.com/alarms-availability/>



BR34 Wireless Glass Break Sensor

Tech Specs

Power Supply	1x CR123A Lithium Batteries	
Dimensions	Height: 74 mm / 2.91 in Width: 74 mm / 2.91 in Depth: 22 mm / .87 in	
Battery Life	Up to 2 years	
Wireless Range	1,000 ft (line-of-sight); 200 ft (typical environment)	
Detection Range	Maximum 15 feet / 5 meters	
Sensor Type	Dual detection, requiring both impact and successive shattering frequencies to trigger alarm	
Wireless Communication	Proprietary 915 MHz (US, Canada) / 868 MHz (UK, Europe)	
Weight	63 g / 2.22 oz	
Operating Temperature	0°C – 45°C (32°F – 113°F); 0-90% humidity	
LED Indicator	Glass break detected and low battery	
Compliance	Please see https://www.verkada.com/alarms-availability/	
Included Accessories	QSG, Wall Screws, Wall Anchors	
Mounting Options	Ceiling or opposite wall (facing glass); Dry wall anchors and screws	
Glass Type	Plate glass, thickness: 2, 3, 5, 6 mm	Laminated glass, thickness: 3, 6 mm
	Tempered glass, thickness: 3, 5, 6 mm	Size: minimum 30 x 30 cm
	Wired glass, thickness: 6, 8 mm	

Note: To reduce false alarms, the glass break sensor should be mounted in an area free of loud noises or vibrations.
For availability, please see <https://www.verkada.com/alarms-availability/>



BR35 Wireless Water Leak Sensor

Tech Specs

Power Supply	1x CR123A Lithium Battery	
Dimensions	Height: 88 mm / 3.46 in Width: 25.4 mm / 1.00 in Depth: 27 mm / 1.08 in	Probe cable length 2.1 m / 7 ft
Battery Life	Up to 5 years	
Wireless Range	1,000 ft (line-of-sight); 200 ft (typical environment)	
Sensor Type	Probe with copper-nickel plated contacts	
Wireless Communication	Proprietary 915 MHz (US, Canada) / 868 MHz (UK, Europe)	
Weight	67 g / 2.36 oz	
Operating Temperature	0°C – 45°C (32°F – 113°F); 0–90% humidity	
LED Indicator	Water detected and low battery	
Compliance	Please see https://www.verkada.com/alarms-availability/	
Included Accessories	QSG, 4x Wall Screws, VHB Adhesive Mount	
Mounting Options	Wall or floor mounted	

For availability, please see <https://www.verkada.com/alarms-availability/>



ACC-CEL-LTE Cellular Backup Module

Ensure your facilities are always protected by Verkada Alarms with a backup LTE internet connection.

Overview

Backup Connectivity

- Multiple LTE network carriers on a single device with automatic failover.
- Plug-and-play with integrated SIM and data plan.

Easy Install and Management

- Easy connection to BP41 Alarm Panel or BH61 Wireless Alarm Hub over USB.
- Cloud-managed in Command for easy configuration and monitoring.
- Unlimited data plan for alarm signaling included in license.

10-Year Warranty

- Verkada’s Cellular Module is covered by our 10-year warranty.



Cellular Backup Module Pricing

Product Name	Description	Cost(MSRP) USD
ACC-CEL-LTE-HW	Cellular Backup Module	\$299
LIC-CEL-1Y	1-Year Cellular Module License	\$499
LIC-CEL-3Y	3-Year Cellular Module License	\$1,499
LIC-CEL-5Y	5-Year Cellular Module License	\$2,499
LIC-CEL-10Y	10-Year Cellular Module License	\$4,999

Cellular Backup Module requires Requires Cellular Backup License (LIC-CEL)
For availability, please see <https://www.verkada.com/alarms-availability/>



Cellular Backup Module

Tech Specs

Power Consumption (5V)	0.5W
Dimensions	Height: 152.4 mm / 6 in Width: 50.8 mm / 2 in Depth: 30 mm / 1.18 in
Antenna	Height: 147.32mm / 5.8 in Width: 38.1 mm / 1.5 in Depth: 12.7 mm / .5 in
Weight	113 g / 4 oz
Operating Temperature	0°C – 45°C (32°F – 113°F); 0–90% humidity
Compliance	Please see https://www.verkada.com/alarms-availability/
Connectivity	USB 2.0 for connection to BP41 Alarm Panel or BH61 Wireless Alarm Hub
Included Accessories	QSG, Torx Screwdriver, 2x Screws, 2x Drywall Anchors
Mounting Options	Dry wall anchors (M8) and screws (M5)



Supported Carriers for the ACC-CEL-LTE Cellular Backup Module

Territory	Carriers
United States	Alaska Wireless, AT&T, Choice Wireless, Commnet, Pulse Mobile Teleguam, T-Mobile, TELNA, Viaero, Cincinnati Bell, Indigo Wireless, Limitless, Sprint, Tampnet, Union Telecom, US Cellular, Viaero
Canada* *excluding Quebec for all products/services	Bell Mobility, Rogers Wireless, Sasktel, Telus, Videotron
Australia* *excluding New South Wales. No availability in this state.	Optus, Telstra, Vodafone (TPG Telecom)
Belgium	Base, Proximus, Orange
Bulgaria	A1 (Mobitel), Yettel (Telenor), Vivacom
Croatia	Hrvatski Telekom (T-Mobile, HTmobile), Telemach (Tele2), A1
Cyprus	Cytamobile-Vodafone, Epic (MTN), PrimeTel
Czech Republic	O2, T-Mobile, Vodafone
Denmark	N/A - Products not available
Estonia	Telia (EMT), Elisa, Tele2
Finland	Alands Telekommunikation (ex Alands Mobiltelefon), DNA, Elisa, Telia Sonera
France	Bouygues Telecom, Free Mobile, Orange, SFR
Germany	O2 (E-Plus), Telekom (T-Mobile), Vodafone
Greece	Cosmote, Vodafone, Wind Hellas
Hungary	Telekom (T-Mobile), Yettel (Telenor), Vodafone
Ireland	Eir, Three (H3G, O2), Vodafone
Latvia	LMT, Tele2
Lithuania	Telia (Omnitel), Tele2, Bite
Luxembourg	Orange, POST, TANGO
Malta	Epic (Vodafone), Go Mobile, Melita
Netherlands	KPN, T-Mobile, Vodafone Libertel
New Zealand	Spark, 2degrees, Vodafone
Poland	Play, Plus (Polkomtel, Orange, T-Mobile)
Portugal	MEO, NOS, Sonaecom, Vodafone
Romania	Orange, Telekom (Cosmote), Vodafone
Slovakia	Orange, Telecom (T-Mobile), O2
Slovenia	A1 (Si.mobil), Telekom Slovenije, Telemach
Sweden	Tele2, Telenor, Telia Mobile
United Kingdom	EE, 3, O2, Vodafone, Jersey



BC51 Alarm Console

Easily arm/disarm sites, review events, initiate panic alarms, and talk down to intruders.

Overview

Site Management and Visibility


- Arm and disarm your site with integrated digital keypad.
- See recent events, live camera feeds, and device status reports.
- Initiate panic alarm in an emergency.

Alarm Communications

- Using the built-in camera, microphone, and speaker, instantly communicate with on site staff or talk down to intruders.
- Users can initiate a call to the Alarm Console from any computer without plugins or additional software.
- Configure custom audio messages to play in the event of an alarm, and broadcast messages through external speakers (includes 3.5 mm audio jack output).

10-Year Warranty

- Verkada’s Alarm Console is covered by our 10-year warranty.

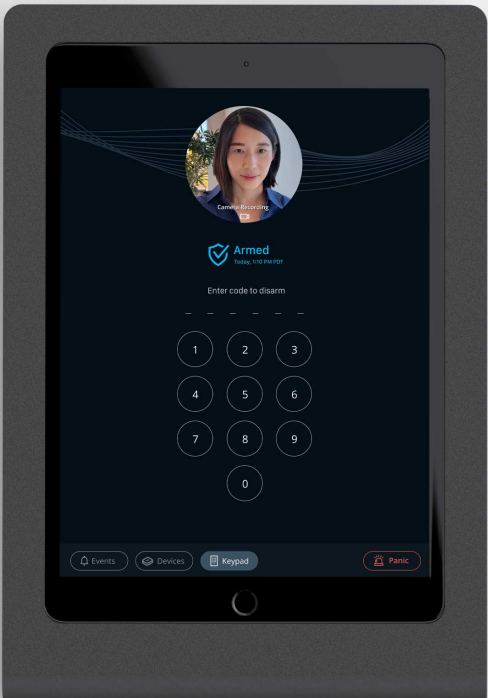

Alarm Console Pricing

Product Name	Description	Cost(MSRP) USD
BC51-HW	Alarm Console	\$999
LIC-BC-1Y	1-Year Console License	\$249
LIC-BC-3Y	3-Year Console License	\$599
LIC-BC-5Y	5-Year Console License	\$999
LIC-BC-10Y	10-Year Console License	\$1,999

Alarm Console requires Alarm License (LIC-BA) and Alarm Console License (LIC-BC)



Alarm Console

Tech Specs

Power Consumption (at 10–14V)	10W	
Dimensions	Tablet 250.6 mm (L) x 174.1 mm (W) x 7.5 mm (H) 9.8 in (L) x 6.8 in (W) x .29 in (H)	Mount 299.7 mm (L) x 205.7 mm (W) x 38.1 mm (H) 11.8 in (L) x 8.1 in (W) x 1.5 in (H)
Display	10.2-inch diagonal LED-backlit Multi-Touch 2160 x 1620 resolution 500 nits brightness	
Camera	720p HD video	
Weight	Tablet 490 grams / 1.09 lbs	Mount 1360 grams / 3 lbs
Operating Temperature	0°C – 35°C (32°F – 95°F)	
Processor	A12 Bionic chip with 64-bit architecture	
Connectivity	Ethernet: 10/100Mbps (through Lightning adapter)	
Audio	Stereo speakers, 3.5 mm jack for external speakers, dual microphones	
Battery	32.4 watt-hour rechargeable lithium-polymer battery, estimated 10 hours battery backup	
Included Accessories	Setup guide, gray steel mount with powdercoat finish, assembly tool, screw pack, PoE adapter	
Mounting Options	Dry wall anchors and screws, self-tapping screws for mullion installation	



BP41 Alarm Panel

Configure wired inputs and outputs for enhanced building security.

Overview

Complete Coverage

- 32 inputs for connecting wired sensors.
- 12V AUX for powered sensors.
- Two programmable 12V power outputs for sirens, strobes, and other alarm signaling devices.
- Terminals for easy connection to one or more backup batteries (sold separately).

Easy Install and Management

- Cloud-managed from Command for easy device configuration.
- Wired in minutes with ergonomic, easy to access 45° offset screw terminals.
- Supports nearly all N.O. / N.C. sensors and 12V output devices.
- Alarm Panels receive automatic software updates for the latest feature updates and security enhancements.

10-Year Warranty

- Verkada’s Alarm Panel and sensors are covered by our 10-year warranty.



Alarm Panel Pricing

Product Name	Description	Cost (MSRP) USD
BP41-HW	32-Input Alarm Panel	\$999
LIC-BP-1Y	1-Year Panel License	\$249
LIC-BP-3Y	3-Year Pane License	\$599
LIC-BP-5Y	5-Year Panel License	\$999
LIC-BP-10Y	10-Year Panel License	\$1,999

Alarm Panel requires Alarm License (LIC-BA) and Alarm Panel License (LIC-BP)



Alarm Panel

Tech Specs

Power Consumption (at 10–14V)	60W	
Inputs	32 inputs for normally open or normally closed sensors Optional 1 kΩ single or double EOLR supervision	
Outputs	2x 12V programmable outputs 1A each	12V AUX power 2A total/combined
Dimensions	415.6 mm / 16.36 in (H) x 319.6 mm / 12.58 in (W) x 111.74 mm / 4.4 in (D)	
Weight	8.19 kg / 18.06 lbs	
Operating Temperature	0°C - 50°C (32°F - 122°F)	
Compliance	Please see https://www.verkada.com/alarms-availability/	
Connectivity	Ethernet: 100/1000Mbps RJ-45 cable connector for network connection, USB 2.0	
Included Accessories	Setup guide, screw pack, torx screwdriver, AC cord, 32x 1kΩ end-of-line resistors	
Mounting Options	Dry wall anchors (M8) and screws (M5)	



BR11 Wired Motion Sensor

Tech Specs




BR11

Power Supply	8–16VDC; 15mA at 12VDC
Dimensions	94 mm (H) x 50 mm (W) x 42 mm (D)
Field of View	90°, 15 m maximum
Sensitivity	Selectable: Standard (3–5 steps) or High (2–4 steps)
Operating Temperature	–40°C – 55°C
Tamper Switch	Normally Closed. 50mA at 30VDC
Temperature Compensation	Bi-Directional
Included Accessories	Setup guide, wall screws, wall anchors

BR12/BR13 Wired Door Contact

Tech Specs



BR12



BR13

Mount Style	Surface mount	Recessed mount
Switch Style	Normally closed	Normally closed
Switch Style	30VDC max, .5A max	30VDC max, .5A max
Resistance	100mΩ initial contact resistance	100mΩ initial contact resistance
Sensor Dimensions	9.5 mm (H) x 50.8 mm (W) x 8.3 mm (D)	Diameter: 9.5–11 mm, Length: 23.3 mm
Magnet Dimensions	9.5 mm (H) x 50.8 mm (W) x 8.3 mm (D)	Diameter: 9.5–11 mm, Length: 14.8 mm
Gap Width	6.5–31.75 mm	6.5–15.24 mm
Operating Temperature	–40° C – 60° C	–40° C – 60° C
Included Accessories	Wall screws	–
Compliance	Please see https://www.verkada.com/alarms-availability/	



Ordering Information

Alarm License Pricing

Product Name	Description	Cost (MSRP) USD
LIC-BA-1Y	1-Year Alarm License	\$1,499
LIC-BA-3Y	3-Year Alarm License	\$3,999
LIC-BA-5Y	5-Year Alarm License	\$5,999
LIC-BA-10Y	10-Year Alarm License	\$11,999

Wireless Alarm Hub Pricing

BH61-HW	Wireless Alarm Hub North America	\$999
LIC-BH-1Y	1-Year Hub License	\$249
LIC-BH-3Y	3-Year Hub License	\$599
LIC-BH-5Y	5-Year Hub License	\$999
LIC-BH-10Y	10-Year Hub License	\$1,999

Wireless Sensors Pricing

BR31-HW	Wireless Door Sensor	\$199
BR32-HW	Wireless Motion Sensor	\$199
BR33-HW	Wireless Panic Button	\$199
BR34-HW	Wireless Glass Break Sensor	\$199
BR35-HW	Wireless Water Leak Sensor	\$199



Ordering Information

Cellular Backup Module Pricing

Product Name	Description	Cost (MSRP) USD
ACC-CEL-LTE	Cellular Backup Module	\$299
LIC-CEL-1Y	1-Year Cellular Backup License	\$499
LIC-CEL-3Y	3-Year Cellular Backup License	\$1,499
LIC-CEL-5Y	5-Year Cellular Backup License	\$2,499
LIC-CEL-10Y	10-Year Cellular Backup License	\$4,999

Alarm Console Pricing

BC51-HW	Alarm Console	\$999
LIC-BC-1Y	1-Year Console License	\$249
LIC-BC-3Y	3-Year Console License	\$599
LIC-BC-5Y	5-Year Console License	\$999
LIC-BC-10Y	10-Year Console License	\$1,999

Alarm Panel Pricing

BP41-HW	32-Input Alarm Panel	\$999
LIC-BP-1Y	1-Year Panel License	\$249
LIC-BP-3Y	3-Year Panel License	\$599
LIC-BP-5Y	5-Year Panel License	\$999
LIC-BP-10Y	10-Year Panel License	\$1,999



Ordering Information

Wired Motion Sensor Pricing

Product Name	Description	Cost (MSRP) USD
BR11-HW	Wired Motion Sensor	\$99

Wired Door Contact Pricing

BR12-HW	Wired Surface Mount Door Contacts - 5 Pack	\$99
BR13-HW	Wired Recess Mount Door Contacts - 5 Pack	\$99